

PRODUCT DATA SHEET

Star Wallmount Cabinet, Start Single Section

Standard

- Complies with ANSI/EIA RS-310-D, IEC 297-1, 19" Mounting, IEC297-2 Overall cabinet dimensions, EN 61587-1:2012 mechanical Structures for Electronic Equipment, DIN41491; PART1, DIN41494; PART7, GB/3047.2-92 standards, UL certified

Material


- SPCC Cold Rolled Steel;
- Thickness: 19" rails: 2mm, others: 1.0mm

Color

- RAL7035
- RAL9004

Loading Capacity

- Static loading: Up to 115 KG

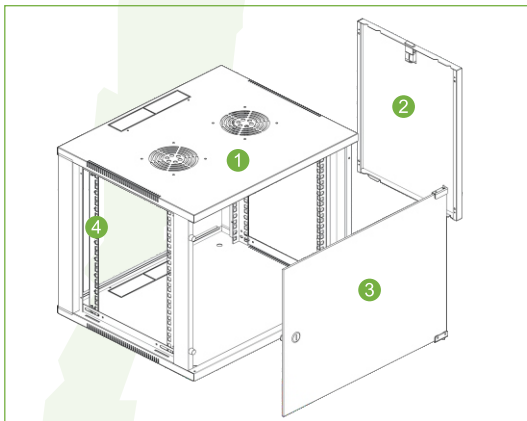

Feature

- Single -section wallmount cabinet.
- Tempered glass front door with 180° turning radius rotatable key lock.
- Removable side and rear panels for quick installation of equipment.
- Adjustable front and rear mounting posts conform to different equipment depth requirements. Dual mounting post with #12-24 threaded holes and square holes for cage nuts.
- Ventilated door design for added air flow and cooling.
- Cable entry brush panel on the top cover and knock-outs on the bottom plate.
- Provided with 1 fan with UL cord installed. Additional fan may be provided upon request.
- Easy to wall mount back plate.
- Available in heights from 6u to 23u.
- Fully assembled for quick installation and packaged in a honeycomb carton. Optional space saving flat packaging available upon request.

Definition of Code

NTFWC ■ ■ ■ U600

Cabinet capacity( U) : 6, 9, 12, 16, 20, 23

Definition of front door:

- Blank-Tempered glass door (default option)
- 1-Tempered glass door with striped hole (Especial request)
- 2-Tempered glass door with hexagon hole (Especial request)
- 3- Sheet steel door (Especial request)
- 4-Sheet steel door with hexagon hole (Especial request)
- 5-High-density vented door (Especial request)



### Main Part

S/N	Specification	Qty	Material	Surface Finish	Remark
1	Frame	1	SPCC t1.0	Powder coated	----
2	Side panel	2	SPCC t1.0	Powder coated	----
3	Front door	1	5MM toughed glass	----	----
4	19 " rails	4	SPCC t1.2	Powder coated	----
A	M6 screw& nuts	10	Steel	Color zinc	----
B	Trox tooling	1	Steel	Black	----

### Specification

Model N o.	RU	Width (mm)	Depth(D)(mm)	Height(H)(mm)	Static Loading Capacity (kg)
NTFWC6U600	6	600	600	370	90
NTFWC9U600	9	600	600	500	90
NTFWC12U600	12	600	600	635	95
NTFWC16U600	16	600	600	770	100
NTFWC20U600	20	600	600	900	110
NTFWC23U600	23	600	600	1080	115