



PRODUCT DATA SHEET

Engineerpro® U/UTP unshielded twisted 4 pairs category 5E slim patch cord

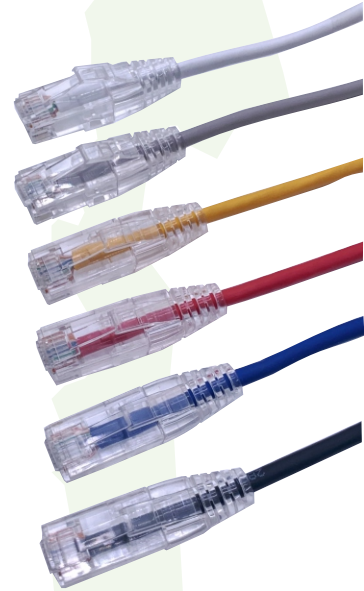

Copper Conductor
HDPE Insulation
Pair
Jacket



Standard

- Electrical performance guaranteed to meet or exceed ANSI/TIA-568.2-D Category 5e and ISO/EIC specifications.
- Independently tested and verified UL.
- Ideal for Data center architectural requirements.
- Stranded cable for maximum flexibility.
- Available with different plug mold.
- Available with different color of cable.
- Available with different length.

Conductor

Conductor	stranded bare copper 28AWG
Insulation	HDPE
Total number of insulated conductors	8, twisted in 4 pairs
Color code	White-Blue/Blue, White-Orange/Orange White-Green/Green, White-Brown/Brown
Individual pair shield	None
Overall shield	None
Drain wire	None

Order information (Part Number)
NTPC5E ___ SL

Available Length			Jacket Color			
01	02	03	BU	RD	WH	YL
05	07	10	GY	BK	GN	OR
15	25	50				

Special orders available upon request.

Nominal Transmission Characteristics

Res.	Length	Prop. Delay	Delay Skew	Freq.	Insertion Loss	NEXT	RL	ACR-N	ACR-F	PS NEXT	PS ACR-N	PS ACR-F
Ω	Max.	ns	ns	MHz	dB	dB	dB	dB	dB	dB	dB	dB
i	100m	555	50	1	3	60.0	17.0	57.0	57.4	57.0	54.0	54.4
				4	4.5	53.5	17.0	49.1	45.4	50.5	46.1	42.4
				8	6.3	48.6	17.0	42.3	39.3	45.6	39.3	36.3
				10	7.1	47.0	17.0	39.9	37.4	44.0	36.9	34.4
				16	9.1	43.6	17.0	34.5	33.3	40.6	31.5	30.3
				20	10.2	42.0	17.0	31.8	31.4	39.0	28.8	28.4
				25	11.4	40.3	16.0	28.9	29.4	37.3	25.9	26.4
				31.25	12.9	38.7	15.1	25.9	27.5	35.7	22.9	24.5
				62.5	18.6	33.6	12.1	15.0	21.2	30.6	12.0	18.5
				100	24	30.1	10.0	6.1	17.4	27.1	3.1	14.4

